


# Unipi Axon M515

## PRODUCT DESCRIPTION

Unipi Axon M515 is a programmable logic controller (PLC) designed for automation, control, regulation and monitoring. The M515 is the intermediate model of the Axon 500 line and aside from a set of digital and relay I/Os it features the highest number of analog I/Os of all Axon controllers. That makes it suitable for complex projects including measurements and control of analog components. The controller is also equipped with three serial interfaces (RS485 + RS232) for connection of extension modules or gateways.

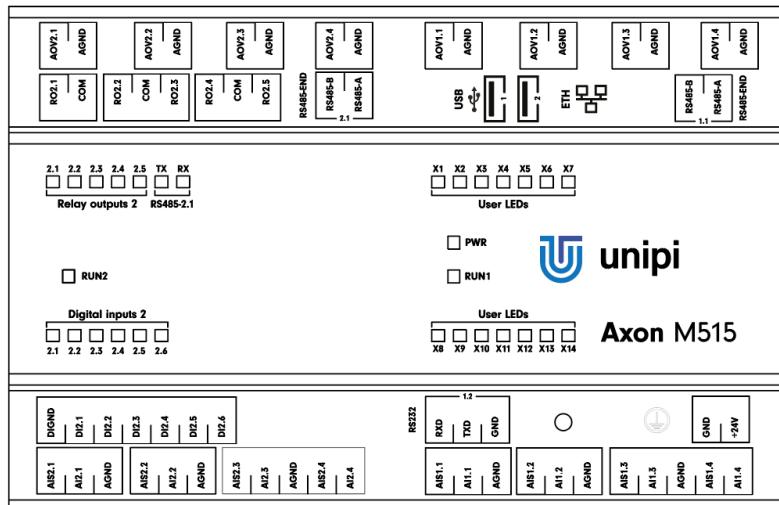

## COMPUTING MODULE

Allwinner H5 1.2 GHz quad-core CPU, 1GB RAM, 8GB eMMC onboard memory

## FEATURES

### Inputs/outputs

- 6 × digital input incl. counter
- 5 × relay output
- 8 × analog input
- 8 × analog output

### Software

- Powered by OS Linux
- Mervis – IDE (IEC 61131-3), HMI editor, proxy server, cloud database, SCADA, wide range of supported protocols
- Open-source solutions – Node-RED, openHAB, Homebridge, FHEM, PiDome, DomoticGa, Domoticz, Pimatic and many more
- Custom SW implementation – EVOK open API, Modbus TCP interface, SysFS

## FUNCTIONALITY

Automation, IoT and IIoT, remote online monitoring and regulation, HVAC control, SCADA, sensorics, smart home control (lighting, doors, locks, irrigation etc.)

### Communication interfaces

- 2 × RS485
- 1 × RS232
- 1 × 1Gbit Ethernet
- 2 × USB 2.0

### Other features

- Built-in webserver
- Special functions – Direct Switch, MasterWatchdog, user LEDs
- Durable aluminium chassis (IP20)
- Extended operating temperature range
- Available in an OEM variant
- Custom development available (IQRF, LoRa, wM-Bus, ZigBee, EnOcean and more)

# Unipi Axon M515

## • Communication

<b>Ethernet</b>	1× 1Gbit Ethernet
<b>Serial/bus channels</b>	3 × RS485, 1 × RS232, 1 × 1-Wire
<b>RS485 1.1, 2.1 transmission speed</b>	134 baud .. 115 200 baud
<b>RS485 galvanic isolation</b>	Yes
<b>RS485 biasing resistors</b>	Yes, 560 Ω
<b>RS485 terminating resistor</b>	Builtin attachable, 120 Ω
<b>RS232 transmission speed</b>	50 baud .. 3 Mbaud
<b>RS232 galvanic isolation</b>	No
<b>WiFi</b>	IEEE 802.11 b/g/n
<b>Bluetooth</b>	4.0, Low Energy (BLE)
<b>WiFi/Bluetooth antenna</b>	Internal
<b>USB</b>	2 × USB 2.0

## • Digital inputs

<b>Nr.of inputs × groups</b>	6 × 1
<b>Common connector</b>	DIGND
<b>Galvanic isolation</b>	Yes
<b>Functions of inputs</b>	Counter (incl. memory), signalization, Direct Switch
<b>Max. frequency of counter input signal</b>	10 kHz
<b>Input voltage of log. 0</b>	Max. 3 V DC
<b>Input voltage of log. 1</b>	Min. 7 V DC
<b>Max. input voltage</b>	35 V DC
<b>Input resistance</b>	6 200 Ω
<b>Delay 0-&gt;1/1-&gt;0</b>	20 µs / 60 µs

## • Relay outputs

<b>Nr.of outputs × groups</b>	1 × 2, 2 × 2
<b>Galvanic isolation</b>	Yes
<b>Type of contact</b>	Normally open (SPST)
<b>Switchable voltage</b>	250 V AC / 30 V DC
<b>Switchable current</b>	5 A
<b>Short time overvoltage</b>	5 A
<b>Current via common conn.</b>	10 A
<b>Time to switch on/off</b>	10 ms
<b>Mechanical lifetime</b>	5 000 000 cycles
<b>Electrical lifetime</b>	100 000 cycles
<b>Protection against shortage</b>	No
<b>Inductive load protection</b>	Not included
<b>Isolation voltage</b>	4 000 V AC

## • Analog inputs

<b>Nr.of inputs × groups</b>	4 × 2
<b>Common connector</b>	AGND
<b>Available functions</b>	0-10 V / 0-2.5 V 0-20 mA 0-1960 Ω 0-100 kΩ
<b>Galvanic isolation</b>	Yes
<b>Resolution</b>	16 bits – U, I 24 bits – R
<b>Conversion speed</b>	60 µs – U, I 400 ms – R
<b>Input resistance</b>	44 kΩ – U 100 Ω – I
<b>Resistance measurement method</b>	2/3wire

## • Analog outputs

<b>Nr.of outputs × groups</b>	4 × 2
<b>Common connector</b>	AGND
<b>Available functions</b>	0-10 V
<b>Galvanic isolation</b>	Yes
<b>Max. voltage/current</b>	10 V / 25 mA
<b>Resolution</b>	12 bits
<b>Conversion speed</b>	300 µs
<b>Resistance measurement method</b>	—

## • Power supply

<b>Rated voltage - SELV</b>	24 V DC
<b>Power consumption</b>	Typ. 6 W Max. 15 W
<b>Reverse polarity protection</b>	Yes

## • Installation and operating conditions

<b>Operating conditions</b>	0 °C .. + 70 °C, relative humidity 10 % .. 95 %, without aggressive substances, condensing vapor and fog
<b>Storing conditions</b>	- 25 °C .. + 70 °C, relative humidity 10 % .. 95 %, without aggressive substances, condensing vapor and fog
<b>Degree of protection</b>	IP 20
<b>IP (IEC 529)</b>	
<b>Operation position</b>	Horizontal
<b>Installation</b>	On 35mm DIN rail into distribution box (holder included)
<b>Connection</b>	Pluggable terminal blocks
<b>Wire gauge</b>	Max. 2.5 mm <sup>2</sup>

## • Dimensions and weight

<b>Dimensions</b>	140 × 90 × 60 mm
<b>Weight</b>	369 g

## • Standards compliance

<b>EN 60730-1 ed.3:2012</b>
<b>RoHS</b>
<b>WEEE</b>

