


Unipi Axon M535

PRODUCT DESCRIPTION

Unipi Axon M535 is a programmable logic controller (PLC) designed for automation, control, regulation and monitoring. The M535 is the intermediate model of the Axon 500 line and aside from a set of digital and relay I/Os it features the highest number of analog I/Os of all Axon controllers. That makes it suitable for complex projects including measurements and control of analog components. The controller is also equipped with three serial interfaces (RS485 + RS232) for connection of extension modules or gateways.

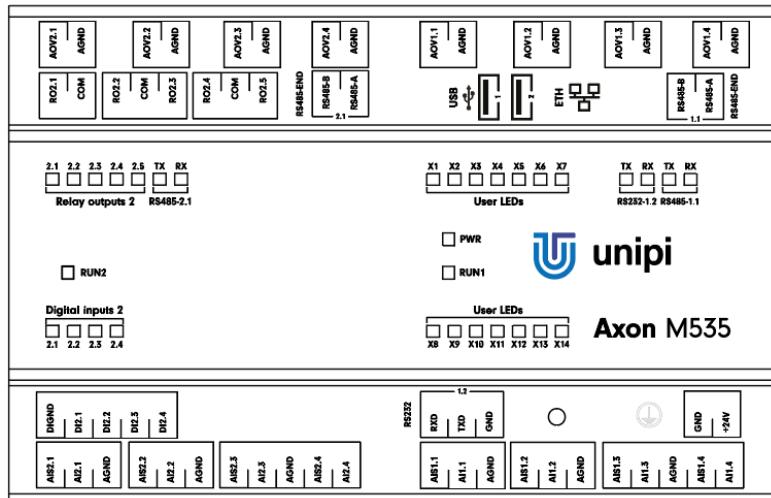

COMPUTING MODULE

Allwinner H5 1.2 GHz quad-core CPU, 1GB RAM, 8GB eMMC onboard memory

FEATURES

Inputs/outputs

4 × digital input incl. counter

5 × relay output

8 × analog input

8 × analog output

Software

- Powered by OS Linux
- Mervis – IDE (IEC 61131-3), HMI editor, proxy server, cloud database, SCADA, wide range of supported protocols
- Open-source solutions – Node-RED, openHAB, Homebridge, FHEM, PiDome, DomoticGa, Domoticz, Pimatic and many more
- Custom SW implementation– EVOK open API, Modbus TCP interface, SysFS

FUNCTIONALITY

Automation, IoT and IIoT, remote online monitoring and regulation, HVAC control, SCADA, sensorics, smart home control (lighting, doors, locks, irrigation etc.)

Communication interfaces

2 × RS485

1 × RS232

1 × 1Gbit Ethernet

2 × USB 2.0

Other features

- Built-in webserver
- Special functions – Direct Switch, MasterWatchdog, user LEDs
- Durable aluminium chassis (IP20)
- Extended operating temperature range
- Available in an OEM variant
- Custom development available (IQRF, LoRa, wM-Bus, ZigBee, EnOcean and more)

Unipi Axon M525

• Communication

| | |
|-----------------------------------|---------------------------|
| Ethernet | 1× 1Gbit Ethernet |
| Serial/bus channels | 2 × RS485, 1 × RS232 |
| RS485 1.1, 2.1 transmission speed | 134 baud .. 115 200 baud |
| RS485 galvanic isolation | Yes |
| RS485 biasing resistors | Yes, 560 Ω |
| RS485 terminating resistor | Builtin attachable, 120 Ω |
| RS232 transmission speed | 50 baud .. 3 Mbaud |
| RS232 galvanic isolation | No |
| WiFi | IEEE 802.11 b/g/n |
| Bluetooth | 4.0, Low Energy (BLE) |
| WiFi/Bluetooth antenna | Internal |
| USB | 2 × USB 2.0 |

• Digital inputs

| | |
|--|--|
| Nr.of inputs × groups | 4 × 1 |
| Common connector | DIGND |
| Galvanic isolation | Yes |
| Functions of inputs | Counter (incl. memory), signalization, Direct Switch |
| Max. frequency of counter input signal | 10 kHz |
| Input voltage of log. 0 | Max. 3 V DC |
| Input voltage of log. 1 | Min. 7 V DC |
| Max. input voltage | 35 V DC |
| Input resistance | 6 200 Ω |
| Delay 0->1/1->0 | 20 µs / 60 µs |

• Relay outputs

| | |
|-----------------------------|----------------------|
| Nr.of outputs × groups | 1 × 2, 2 × 2 |
| Galvanic isolation | Yes |
| Type of contact | Normally open (SPST) |
| Switchable voltage | 250 V AC / 30 V DC |
| Switchable current | 5 A |
| Short time overvoltage | 5 A |
| Current via common conn. | 10 A |
| Time to switch on/off | 10 ms |
| Mechanical lifetime | 5 000 000 cycles |
| Electrical lifetime | 100 000 cycles |
| Protection against shortage | No |
| Inductive load protection | Not included |
| Isolation voltage | 4 000 V AC |

• Analog inputs

| | |
|-------------------------------|---|
| Nr.of inputs × groups | 4 × 2 |
| Common connector | AGND |
| Available functions | 0-10 V / 0-2.5 V 0-20 mA 0-1960 Ω 0-100 kΩ |
| Galvanic isolation | Yes |
| Resolution | 16 bits – U, I 24 bits – R |
| Conversion speed | 60 µs – U, I 400 ms – R |
| Input resistance | 44 kΩ – U 100 Ω – I |
| Resistance measurement method | 2/3wire |

• Analog outputs

| | |
|-------------------------------|--------------|
| Nr.of outputs × groups | 4 × 2 |
| Common connector | AGND |
| Available functions | 0-10 V |
| Galvanic isolation | Yes |
| Max. voltage/current | 10 V / 25 mA |
| Resolution | 12 bits |
| Conversion speed | 300 µs |
| Resistance measurement method | — |

• Power supply

| | |
|-----------------------------|-----------------------|
| Rated voltage - SELV | 24 V DC |
| Power consumption | Typ. 7 W Max. 16 W |
| Reverse polarity protection | Yes |

• Installation and operating conditions

| | |
|----------------------|---|
| Operating conditions | 0 °C .. + 70 °C, relative humidity 10 % .. 95 %, without aggressive substances, condensing vapor and fog |
| Storing conditions | - 25 °C .. + 70 °C, relative humidity 10 % .. 95 %, without aggressive substances, condensing vapor and fog |
| Degree of protection | IP 20 |
| IP (IEC 529) | |
| Operation position | Horizontal |
| Installation | On 35mm DIN rail into distribution box (holder included) |
| Connection | Pluggable terminal blocks |
| Wire gauge | Max. 2.5 mm ² |

• Dimensions and weight

| | |
|------------|------------------|
| Dimensions | 140 × 90 × 60 mm |
| Weight | 362 g |

• Standards compliance

| | |
|----------------------|--|
| EN 60730-1 ed.3:2012 | |
| RoHS | |
| WEEE | |

