


# Unipi Neuron S103-G

## PRODUCT DESCRIPTION

Unipi Neuron S103-G is a programmable logic controller designed for automation, control, regulation and monitoring. The S103-G's universal architecture includes digital and analog I/Os, making it suitable for simple installations. As a special feature, the S103-G also features an integrated GSM/GPRS functionality for internet access or sending/receiving SMS messages. The controller is also provided with a single RS485 serial interface and a 1-Wire interface for connection of digital humidity or temperature sensors.

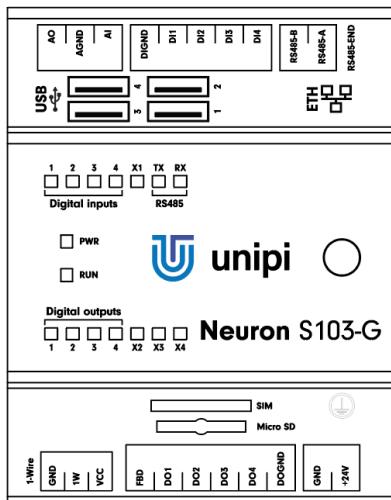

## COMPUTING MODULE

Raspberry Pi 3 Model B  
 (quad-core 1.2 GHz CPU, 1 GB RAM)

## FEATURES

### Inputs/outputs

- 4 × digital input incl. counter
- 4 × digital output
- 1 × analog input
- 1 × analog output

### Software

- Powered by OS Linux
- Mervis – IDE (IEC 61131-3), HMI editor, proxy server, cloud database, SCADA, a wide range of supported protocols
- Commercial solutions – CODESYS, REXYGEN
- Open-source solutions – Node-RED, openHAB, Homebridge, FHEM, PiDome, DomoticGa, Domoticz, Pimatic and many others
- Custom SW implementation – EVOK open API, Modbus TCP interface, SysFS

## FUNCTIONALITY

Smart home control (lighting, doors, smart locks, irrigation etc.), automation, remote online supervision, monitoring and regulation, HVAC control, SCADA, sensors, IoT/IoT

### Communication interfaces

- 1 × RS485
- 1 × 1-Wire bus
- 1 × 10/100Mbit Ethernet
- 4 × USB 2.0
- 1 × GSM/GPRS interface

### Other features

- Built-in webserver
- Special functions – Direct Switch, MasterWatchdog, user LEDs
- Durable aluminium chassis (IP20)
- Available in an OEM variant
- Custom development available (IQRF, LoRa, wM-Bus, ZigBee, EnOcean and more)

# Unipi Neuron S103-G

## • Communication

<b>Ethernet</b>	1 × 10/100 Mbit Ethernet
<b>Serial/bus channels</b>	1 × RS485, 1 × 1-Wire
<b>RS485 transmission speed</b>	134 baud .. 115 200 baud
<b>RS485 galvanic isolation</b>	Yes
<b>RS485 biasing resistors</b>	Yes, 560 Ω
<b>RS485 terminating resistor</b>	Builtin attachable, 120 Ω
<b>1-Wire galvanic isolation</b>	Yes
<b>1-Wire output voltage Vcc</b>	5 V
<b>1-Wire max. current Vcc</b>	50 mA
<b>1-Wire connector</b>	3 × pole, max. 1.5 mm <sup>2</sup>
<b>WiFi</b>	IEEE 802.11b/g/n
<b>Bluetooth</b>	4.2, Low Energy (BLE)
<b>WiFi/Bluetooth antenna</b>	Internal
<b>USB</b>	4 × USB 2.0
<b>GSM/GPRS class</b>	10
<b>GSM frequency bands</b>	850/900/1800/1900 MHz
<b>SIM card type</b>	miniSIM
<b>GSM/GPRS antenna</b>	2 dBi - SMA

## • Digital inputs

<b>Nr. of inputs × groups</b>	4 × 1
<b>Common connector</b>	DIGND
<b>Galvanic isolation</b>	Yes
<b>Functions of inputs</b>	Counter (w/o memory), signalization, Direct Switch
<b>Max. frequency of counter input signal</b>	10 kHz
<b>Input voltage of log. 0</b>	Max. 3 V DC
<b>Input voltage of log. 1</b>	Min. 7 V DC
<b>Max. input voltage</b>	35 V DC
<b>Input resistance</b>	6 200 Ω
<b>Delay 0-&gt;1/1-&gt;0</b>	20 µs / 60 µs

## • Digital outputs

<b>Nr.of outputs × groups</b>	4 × 1
<b>Common connector</b>	DOGND
<b>Galvanic isolation</b>	No
<b>Type of output</b>	NPN transistor (open collector)
<b>Optional functions</b>	PWM
<b>Switchable voltage</b>	5–50 V DC
<b>Switchable current continual/pulse</b>	750 mA / 1 A
<b>Max. total current DO1 – DO4</b>	1 A
<b>PWM max. frequency</b>	200 kHz
<b>PWM max. resolution</b>	16 bits

## • Analog inputs

<b>Nr.of inputs × groups</b>	1 × 1
<b>Common connector</b>	AGND
<b>Available functions</b>	0–10 V 0–20 mA
<b>Galvanic isolation</b>	No
<b>Resolution</b>	12 bits
<b>Conversion speed</b>	10 µs
<b>Input resistance</b>	66 kΩ – U 100 Ω – I
<b>Resistance measurement method</b>	–

## • Analog outputs

<b>Nr. of outputs × groups</b>	1 × 1
<b>Common connector</b>	AGND
<b>Available functions</b>	AO 0–10 V / 0–20 mA Resistance measurement: 0–2 kΩ Pt/Ni1000)
<b>Galvanic isolation</b>	No
<b>Max. voltage/current</b>	10 V / 20 mA
<b>Resolution</b>	12 bits
<b>Conversion speed</b>	1 ms
<b>Resistance measurement method</b>	2wire

## • Power supply

<b>Rated voltage - SELV</b>	24 V DC
<b>Power consumption</b>	Typ. 8 W Max. 17 W
<b>Reverse polarity protection</b>	Yes

## • Installation and operating conditions

<b>Operating conditions</b>	0 °C .. + 55 °C, relative humidity 10 % .. 95 %, without aggressive substances, condensing vapour and fog
<b>Storing conditions</b>	- 25 °C .. + 70 °C, relative humidity 10 % .. 95 %, without aggressive substances, condensing vapour and fog
<b>Degree of protection</b>	IP 20
<b>IP (IEC 529)</b>	
<b>Operation position</b>	Horizontal
<b>Installation</b>	On 35mm DIN rail into distribution box (holder included)
<b>Connection</b>	Pluggable terminal blocks
<b>Wire gauge</b>	Max. 2.5 mm <sup>2</sup>

## • Dimensions and weight

<b>Dimensions</b>	70 × 90 × 60 mm
<b>Weight</b>	210 g

## • Standards compliance

<b>IEC 60950-1: 2005(ed.2)</b>	
<b>EN 62311: 2008</b>	
<b>EN 60730-1 ed.3:2012</b>	
<b>EN 301 489-1</b>	
<b>EN 301 487-17 Ver. 3.1.1</b>	
<b>EN 300 328 Ver 2.1.1</b>	
<b>EN 301 893 V2.1.1</b>	
<b>RoHS</b>	
<b>WEEE</b>	

