


UniPi Neuron L513

Series	Digital inputs	Digital outputs	Relay outputs	Analog inputs	Analog outputs	Communication
L51x	16	4	10	9	9	3x RS485 1x Ethernet 10/100 1x 1Wire bus

Model	CPU	RAM	Others
L513	4x 1.2 GHz	1 GB	Wifi + Bluetooth

Basic properties

- Power supply 24 V DC
- RTC with backup up to 7 days
- Linux operating system
- 1x 10/100 Ethernet
- 4x USB for connecting other devices Wifi, 3G(LTE),...
- 3x RS485 galvanically isolated serial interface for connection of expansion and communication modules
- Direct Switch function
 - Rapid input response within the group – tens of μ s
 - Available features: identity, negation, toggle
- Watchdog for monitoring running of the control system
- Save and restore settings and fail-safe state of outputs to NVRAM and reload at startup
- Hardware restart function of 1Wire bus
- Possibility to choose multiple programming platforms
 - Mervis
 - REX
 - CODESYS
 - OpenSource
 - TCP ModBus and other interfaces are available for your OWN applications
- 4x user-configurable LEDs
- ready for wireless technologies - Zigbee, Lora, Sigfox, IQRF, GSM, LTE, ...
- Built-in Web server for display of user applications
- Compact size and easy installation on DIN rail

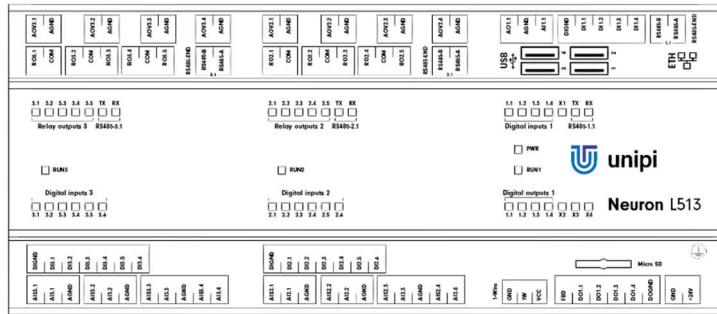

Communication		Analog inputs	
Ethernet	1× 10/100BaseT	Nr. of inputs × groups	4 × 2
Serial channels	3× RS485, 1× 1-Wire	Common connector	AGND
Transmission speed RS485	9.6 .. 115 kbps	Available functions	0 – 10 V 0 – 20 mA
Galvanic isolation RS485	Yes	Galvanic isolation	Yes
Galvanic isolation 1-Wire	Yes	Resolution	24 bits – R 16 bits – U, I
Digital inputs		Conversion speed	400 ms – R 60µs – U, I
Number of inputs × groups	4 × 1, 6 × 2		10µs
Common connector	DIGND		
Galvanic isolation	Yes		
Functions of inputs	Signalization, counter, Direct Switch		
Operation range	5 – 40 V DC	Analog outputs	
Input voltage of log. 0	Max. 3,5 V DC	Nr. of out. × groups	4 × 2
Input voltage of log. 1	Min. 5 V DC	Common connector	AGND
Input resistance of log. 1	6 200Ω	Available functions	0 – 10 V AI:0 – 2 kΩ, Ni1000, Pt1000
Delay 0->1/1->0	20 µs / 60 µs	Galvanic isolation	Yes
Digital outputs		Resolution	12 bits
Number of outputs × groups	4 × 1	Conversion speed	300 µs
Common connector	DOGND		1 ms
Galvanic isolation	No	Power supply	
Type of output	Transistor	Rated voltage - SELV	24 V DC
Additional functions	PWM	Voltage tolerance	-15% .. +25% 20,4 .. 30 V DC
Switchable voltage	5 – 50 V DC	Power consumption	Typ. 14 W Max. 23 W
Switchable current continual/pulse	750 mA / 1 A	Internal protection	Yes
Max. total current DO1.1–1.4	1A	Installation and operating conditions	
Time to switch on/off	Typ. 130 ns / 20ns	Operating temperature	0 °C .. + 55 °C
Switching speed	Max. 200 kHz/8bit	Storing temperature	-25 °C .. +70 °C
Relay outputs		Dielectrical strength	According to EN 60950
Number of outputs × groups	1 × 2, 2 × 4	Degree of protection IP	IP20
Galvanic isolation	Yes	Operation position	Horizontal
Type of contact	Closing contact	Installation	On 35mm DIN rail into distribution box
Switchable voltage	250 V AC/30 V DC	Connection	Pluggable terminal blocks
Switchable current	5A	Wire gauge	Max. 2,5 mm ²
Short time overvoltage	5A	Standards compliance	
Current via common conn.	10A	ČSN EN 6095-1 ed. 2	
Time to switch on/off	10ms	ČSN EN 61000-6-3 ed. 2	
Mechanical lifetime	5 000 000	ČSN EN 55014-1 ed. 3	
Electrical lifetime	100 000	ČSN EN 55022 ed. 3	
Protection against shortage	No	2006/95/EC	
Inductive load protection	External	2004/108/ES	
Isolation voltage	4 000 V AC	2014/35/EU	
Dimensions and weight		2014/30/EC	
Dimensions	210 × 90 × 59 mm		
Weight	900 g		

